COOLMAX POE 68

Product code: 262202501

Advanced HFC refrigeration compressor fluid


This product is a high-performance lubricant that combines specially blended polyol ester (POE) refrigeration lubricants with ashless additives to provide superior protection for HFC refrigeration systems. It offers exceptional solubility and superior lubricity in HFC and blended refrigerants.

This lubricant has an exceptional chemical and thermal stability, and offer a very long service life.

Benefits & Advantages

- Unsurpassed solubility in HFC and blended refrigerants
- Excellent low temperature fluidity
- High viscosity index
- Excellent film strength and anti-wear properties
- Top-off compatibility with most other POE refrigeration compressor fluids
- Excellent resistance against water contamination
- Excellent rust and corrosion protection
- Very long fluid life
- Allows quick and easy refrigerant conversions
- Avoids copper plating
- Enhanced resistance against water contamination

Most competitive POE compressor fluids are highly susceptible to water contamination. The hygroscopic nature (high affinity for water) of most POE compressor fluids will lead to decreased bearing life and premature fluid change outs. It offers enhanced resistance to water contamination.

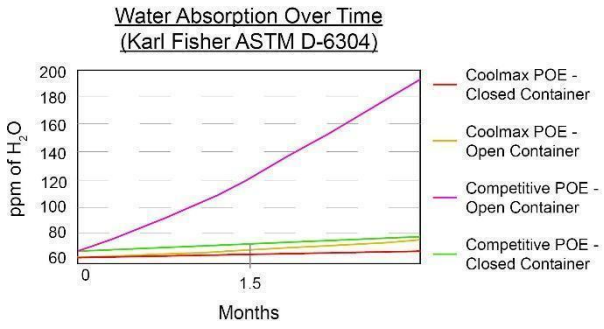

Matrix Specialty Lubricants
Typograaf 16 - 6921 VB Duiven
The Netherlands
+ 31 (0) 316 740 850
info@matrix-lubricants.com
www.matrix-lubricants.com

ISO 9001:2015 ISO 14001:2020 ISO 21469:2006
V 6.5.24

COOLMAX POE 68

Product code: 262202501

- ***Formulated to make conversions easier***

Converting a HCFC (i.e., R-22) system to HFC (i.e. R-507, R-134a) often requires that you flushes any mineral oil fluid from the system. Most competitive fluids will require that you have no more then 5% of the existing mineral oil remaining in the system. To reach this 5% level multiple flushes are often required, which can be very time consuming and costly.

This product makes systems conversions easier by being able to accommodate much high levels of residual mineral oil.

ASRAE#	Recommended # of Residual Mineral Oil	
	Competitive Formulations	Series Coolmax POE
R-134a	Max 5%	10-15%
R-507	Max 5%	10-15%

Gas type compatibility
The product is suitable for processing the following gases:

R23	R134a	R404a	R410a	R410b	R407c
R410b	R417a	R422a	R422d	R427a	R507/507a

Typical Performance Data

Typical	Test Method	Value
Appearance		Bright & clear
Base oil type		Polyol ester
Colour APHA	MD 31	<200
Density @ 15 °C, kg/dm3	ISO 12185	0.952
Acid number mg KOH/g	ISO 6618	<0.1
Kin. viscosity 40 °C, cSt	ISO 3104	68
Viscosity index	ISO 2909	144
Water content, ppm	MO-10-001	<50
Pour point, °C	ISO 3016	<-42
Flash point, COC, °C	ISO 2592	>234

All performance data on this Technical Data Sheet are indicative only and can vary during production.

Matrix Specialty Lubricants
Typograaf 16 - 6921 VB Duiven
The Netherlands
+ 31 (0) 316 740 850
info@matrix-lubricants.com
www.matrix-lubricants.com

ISO 9001:2015 ISO 14001:2020 ISO 21469:2006
V 6.5.24